

J25

4U Active Air Cooler

PRODUCT SPECIFICATIONS

Specification Version: 08/21/2025

(Specifications are subject to change without notice)

Model Number: J25

- Recommend for AMD® CPU as following
 - AMD® Processor Family, Socket SP7
- Active Air Cooler for 4U Server and Up


Overall Specification

Dimension	120.0 x 103.6 x 129.0 mm
Weight	1230g
Material	Aluminum Fin + Heat pipes + Copper Heat Spreader Embedded Aluminum VC Base
Thermal Grease	Shin-Etsu 8195-4 or Equivalent Pre-Printed
TDP	Fully Support 600W at 30°C Ambient Temperature


Cooling Fan Specification

Model Number	DF121030BX
Dimension	102.0 x 102.0 x 30.8 mm
Bearing	Double Ball
Rated Voltage	DC 12V
Rated Speed	At Duty Cycle 0~20%: 1250± 200 RPM At Duty Cycle 50%: 3100± 10% RPM At Duty Cycle 100%: 6000±10% RPM
Input Power	At Duty Cycle 0~20%: 0.72 W At Duty Cycle 50%: 3.0 W At Duty Cycle 100%: 19.2 W
Maximum Airflow	At Duty Cycle 0~20%: 34.33 CFM At Duty Cycle 50%: 60.33 CFM At Duty Cycle 100%: 116.77 CFM
Rated Static Pressure	At Duty Cycle 0~20%: 0.99 mm-H2O At Duty Cycle 50%: 6.11 mm-H2O At Duty Cycle 100%: 22.89 mm-H2O
Acoustical Noise	At Duty Cycle 0~20%: 20.88 dBA At Duty Cycle 50%: 40.60 dBA At Duty Cycle 100%: 54.94 dBA
Lead Wire Pin Out	Pin#1- Black(-) Pin#2- Black (+) Pin#3- Black (Tachometer/ Signal Output) Pin#4- Black (PWM)

J25 | Socket SP7

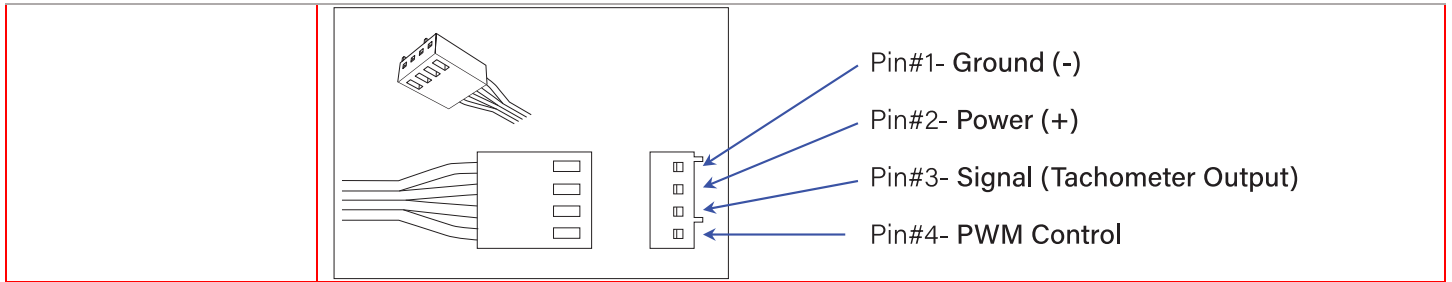



Performance Chart: J25 Thermal Resistance Thermal Resistance vs. Fan Speed

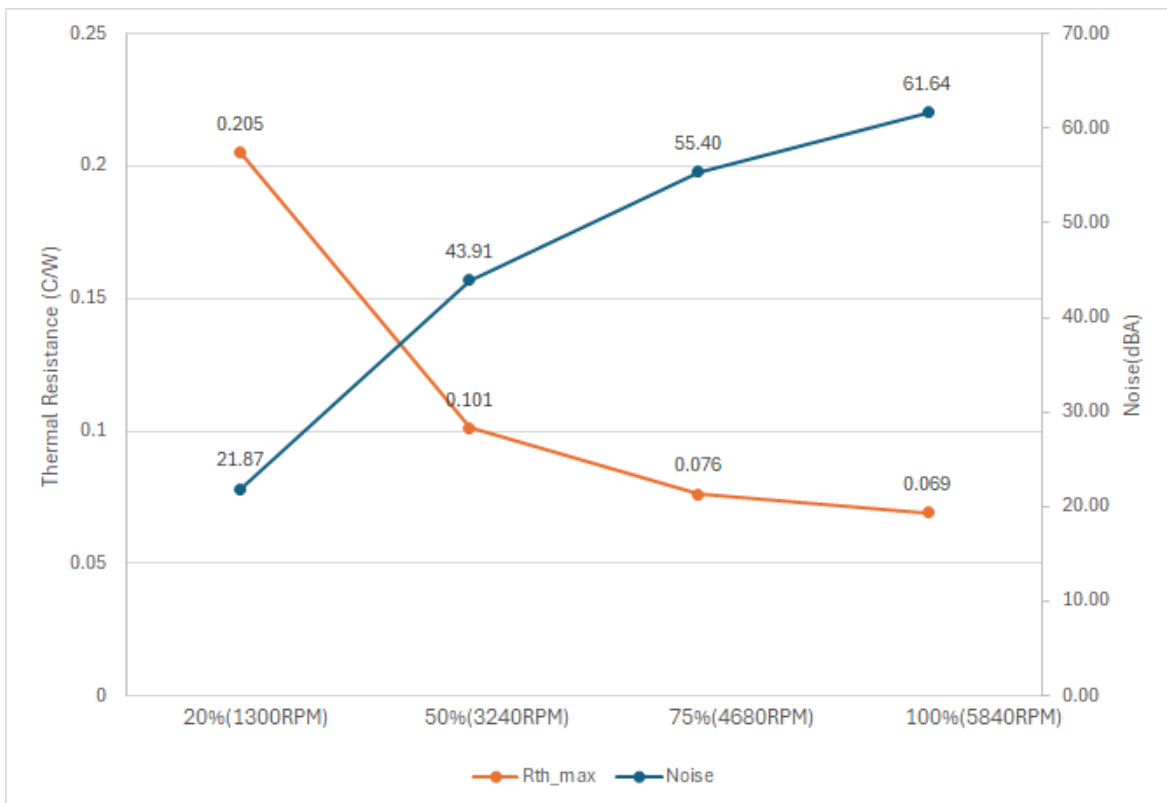

CONFIDENTIAL DOCUMENT

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD.
ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS DYNATRON
CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. MAY OTHERWISE AGREE TO IN WRITING.

REV#	DESCRIPTION	CHECKER	DATE
0.0	INITIAL RELEASE	MichaelF	04/04/25
0.1	FAN AND HEAT PIPE GEOMETRY UPDATE	MichaelF	04/08/25

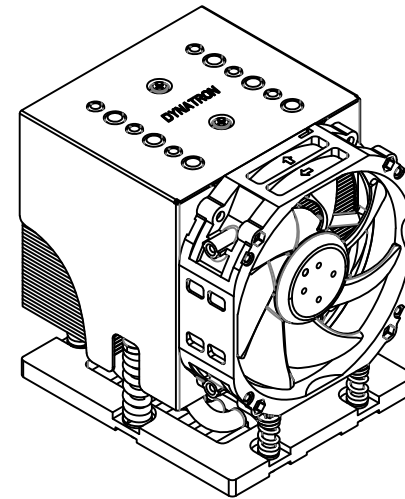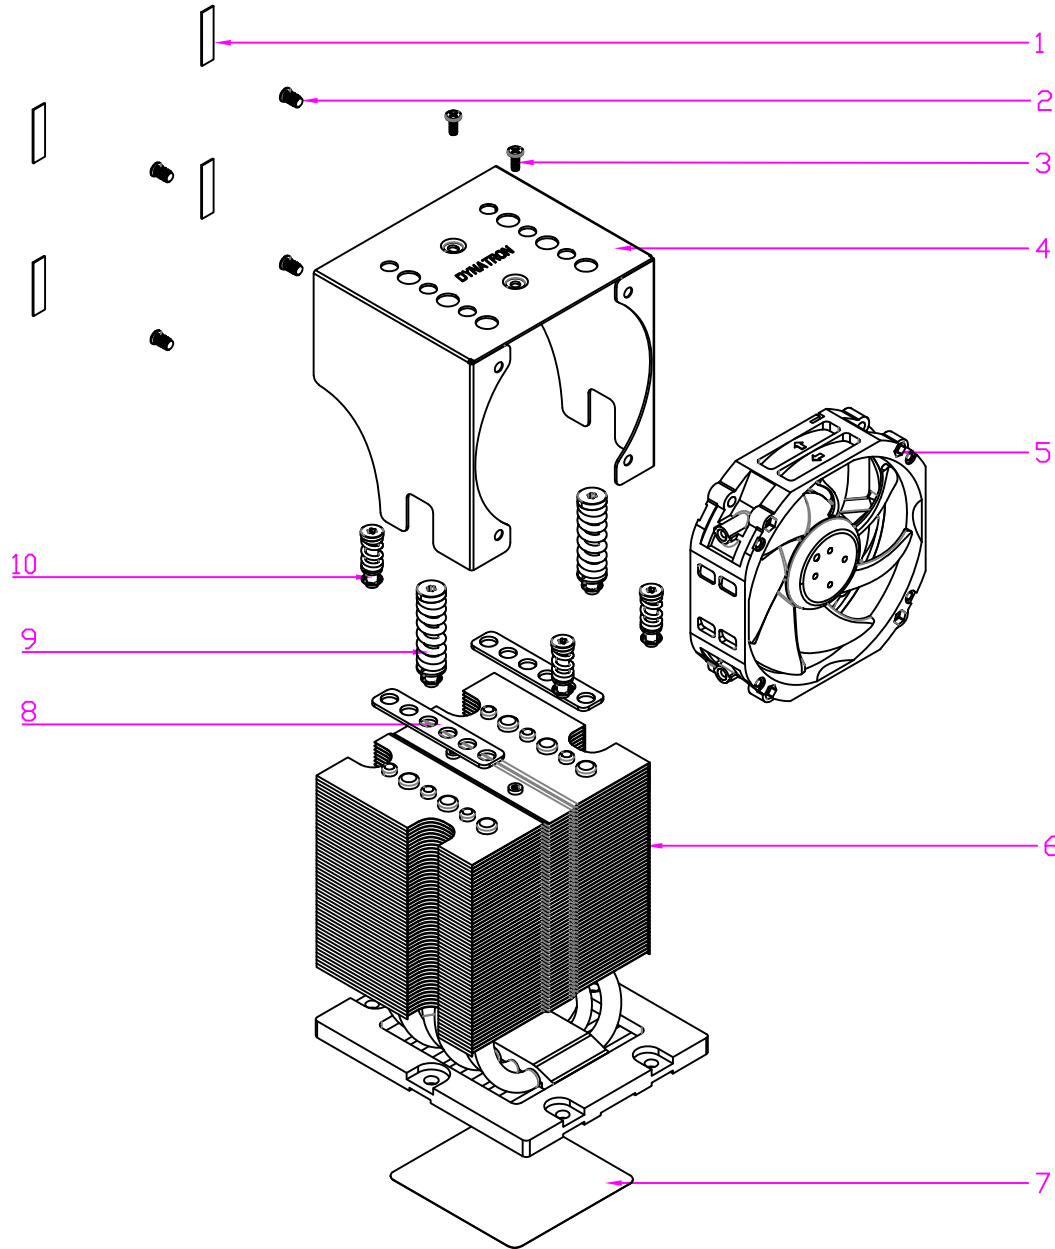


10	INSTALLATION SCREW KIT (CORNER)	STEEL	4
9	INSTALLATION SCREW KIT (CENTER)	STEEL	2
8	FAN RETENTION BRACKET GASKET PAD	FOAM	2
7	THERMAL GREASE	SHIN-ETSU 8195-4 or EQUIVALENT	N/A
6	HEATSINK	COPPER + AL BASE, HEAT PIPE, AL FINS	1
5	FAN 10330, 6000RPM	PLASTIC	1
4	FAN RETENTION BRACKET	SPCC	1
3	FAN RETENTION BRACKET SCREW	STEEL	2
2	FAN SCREW	STEEL	4
1	GASKET PAD, HEATSINK	FOAM	4
ITEM #	DESCRIPTION	MATERIAL	QTY.

DATE		NAME	 DYNATRON CORPORATION
DRAWN		04/08/25 MichaelF	
CHECKED		04/08/25 MichaelF	
ENG. APPR.			
MFG. APPR.			
QA			TITLE: 4U Air Cooler J25 BOM & Exploded Assembly Drawing
COMMENTS			
DWG. No: DYN-EP-J25			REV 0.1

NOTES:

1. THE FIGURE IS FOR REFERENCE ONLY, AND NOT FOR SCALE

Recommended Torque Application Pattern for Socket SP7 Coolers

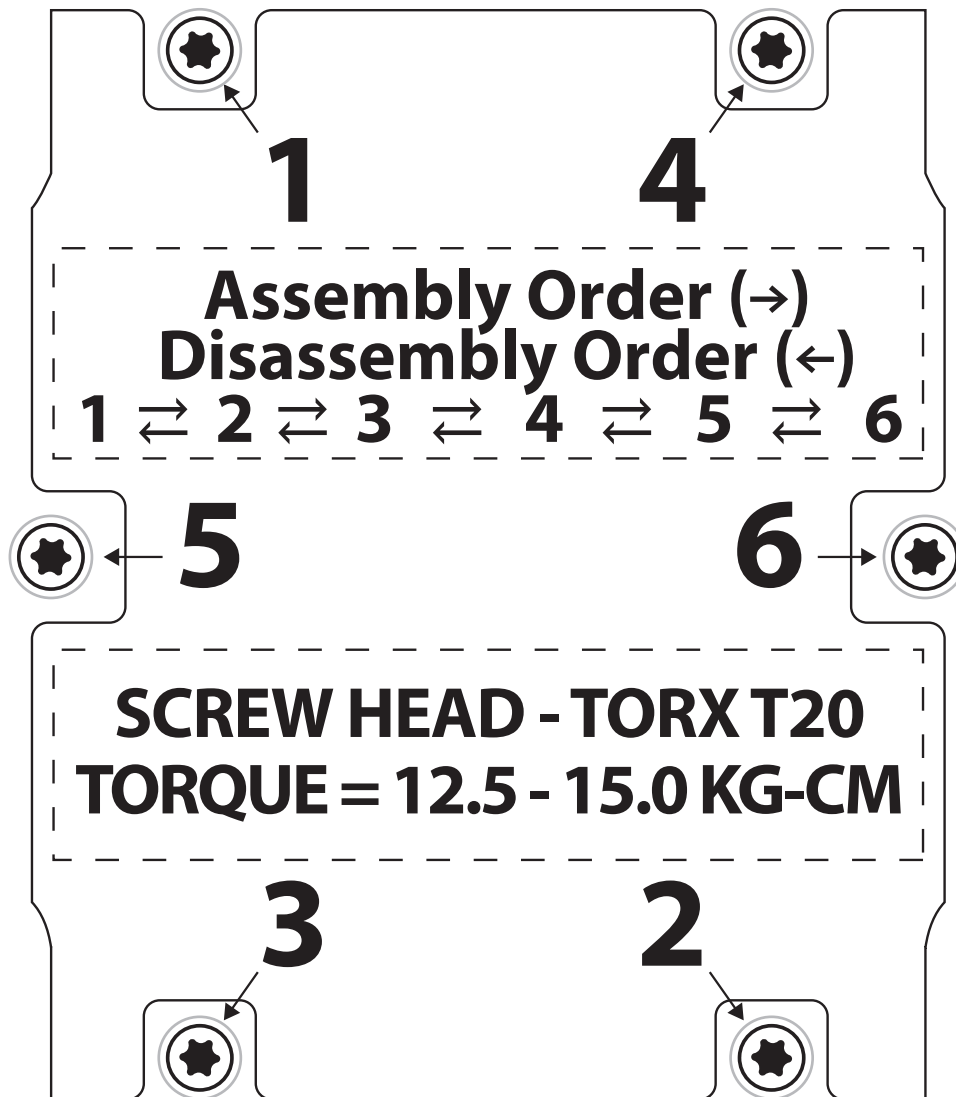

WARNING: Failure to attach thermal solutions one-at-a-time in the sequence 1-2-3-4-5-6 and failure to remove thermal solutions one at a time in the sequence 6-5-4-3-2-1 can lead to permanent socket damage.

Publication History:

08/21/2025: Thermal Resistance vs. Fan Speed

04/08/2025: Fin and Heat Pipe Geometry Update

04/04/2025: Initial Release

(Specifications are subject to change without notice)