


# G593-SD1-AAX3

HPC/AI Server - 5U DP NVIDIA HGX™ H200

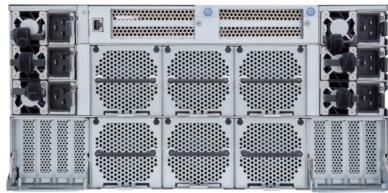

## Key Features

- NVIDIA-Certified Systems™ - Data Center Servers
- NVIDIA HGX™ H200
- 900GB/s GPU-to-GPU bandwidth with NVIDIA NVLink™ and NVSwitch™
- Dual 5th/4th Gen Intel® Xeon® Scalable Processors
- Dual Intel® Xeon® CPU Max Series
- 8-Channel DDR5 RDIMM, 32 x DIMMs
- Dual ROM Architecture
- Compatible with NVIDIA® BlueField®-3 DPUs/SuperNICs
- 2 x 10Gb/s LAN ports via Intel® X710-AT2
- 8 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 4 x FHHL PCIe Gen5 x16 slots
- 8 x LP PCIe Gen5 x16 slots
- 4+2 3000W 80 PLUS Titanium redundant power supplies

## Specification

<b>Dimensions</b>	5U (W447 x H219.7 x D945 mm)	<b>Modular GPU</b>	NVIDIA HGX™ H200 with 8 x SXM GPUs	
<b>Motherboard</b>	MSB3-G41	<b>PCIe Expansion Slots</b>	4 x FHHL PCIe Gen5 x16 8 x LP PCIe Gen5 x16	
<b>CPU</b>	5th Generation Intel® Xeon® Scalable Processors 4th Generation Intel® Xeon® Scalable Processors Intel® Xeon® CPU Max Series Dual processor, TDP up to 350W	<b>I/O Ports</b>	<b>Front:</b> 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default) <b>Rear:</b> 1 x MLAN	
<b>OS Compatibility</b> <a href="#">OS Support List</a>			<b>Backplane Board</b> PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s	
<b>Socket</b>	2 x LGA 4677 (Socket E)	<b>TPM</b>	1 x TPM header (SPI), Optional TPM2.0 kit: CTM010	
<b>Chipset</b>	Intel® C741	<b>Power Supply</b>	4+2 3000W 80 PLUS Titanium redundant power supplies AC Input: 100-240V	
<b>Memory</b>	8-Channel DDR5 RDIMM, 32 x DIMMs [5th Gen Intel Xeon] Up to 5600 MT/s (1DPC), 4400 MT/s (2DPC) <sup>[1]</sup> [4th Gen Intel Xeon] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC) [Intel Xeon Max Series] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC)	*The system power supply requires C19 power cord.		
[1] 5600 MT/s support under 2DPC configuration requires verified memory and BIOS setup.			<b>System Management</b> ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface	
<b>LAN</b>	<b>Front:</b> 2 x 10Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mbps Management LAN <b>Rear:</b> 1 x 10/100/1000 Mbps Management LAN	<b>System Fans</b>	Motherboard: 2 x 40x40x28mm 4 x 60x60x56mm PCIe slots: 4 x 40x40x28mm 2 x 40x40x56mm GPU tray: 6 x 60x60x76mm 11 x 80x80x80mm	
<b>Video</b>	Integrated in ASPEED® AST2600 - 1 x VGA port	<b>Operating Properties</b>	Operating: 10°C to 35°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)	
<b>Storage</b>	<b>Front hot-swap:</b> 8 x 2.5" Gen5 NVMe/SATA/SAS-4 <sup>[1]</sup>	<b>Packaging Content</b>	1 x G593-SD1-AAX3 2 x CPU heatsinks 6 x Carriers 1 x L-shape Rail kit	
[1] SAS card is required to support SAS drives.				
<b>RAID</b>	Intel® SATA RAID 0/1/10/5 Support <b>optional</b> RAID add-in cards	<b>Ordering Part Numbers</b>	6NG593SD1DR000ABX3*	



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.

\* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

