

L45

2U Liquid Cooler

PRODUCT SPECIFICATIONS

Speficiation Version: 03/04/2024

(Specifications are subject to change without notice)

Model Number: L45

- Recommend for Intel® CPU as following
 - Intel® Granite Rapid SP Processors, Socket LGA4710
- Liquid Cooler for 2U Server and Up


Overall Specification

- Coldplate Module with Copper Base
- Space saver light weight radiator
- 8cm Cooling Fans with 4-Pin PWM Connector
- Stand-alone Water Pump with Powerful Flow Rate 2.9 Liter Per Minute
- 30cm Black Pair EPDM Tube Assembled
- Mounting Accessories are included
- Shin-Etsu X23-8079-2 Thermal Compound Pre-Printed on Base
- Support CPU up to 870 Watts@20°C ambient Heat Dissipation
- **Each fan should have its own fan header due to high current consumption at full speed**


Cooling Fan Specification

Model Number	DF128038BX-PWMG
Dimension	80 x 80 x 38mm
Bearing	Dual Ball
Rated Voltage	12V
Rated Speed	At Duty Cycle 0~20%: 2400± 10% RPM At Duty Cycle 50%: 4800± 10% RPM At Duty Cycle 100%: 8000±10% RPM
Input Power	At Duty Cycle 0~20%: 1.2 W At Duty Cycle 50%: 5.52 W At Duty Cycle 100%: 24.72 W
Maximum Airflow	At Duty Cycle 0~20%: 35.52 CFM At Duty Cycle 50%: 67.24 CFM At Duty Cycle 100%: 115.61 CFM
Rated Static Pressure	At Duty Cycle 0~20%: 1.39 mm-H2O At Duty Cycle 50%: 5.97 mm-H2O At Duty Cycle 100%: 34.06 mm-H2O
Acoustical Noise	At Duty Cycle 0~20%: 25.63 dBA At Duty Cycle 50%: 47.85 dBA At Duty Cycle 100%: 64.40 dBA
Lead Wire Pin Out	Pin#1- Black(-) Pin#2- Yellow(+) Pin#3- Green(Tachometer/ Signal Output) Pin#4- Blue(PWM)

L45 | Socket LGA4710

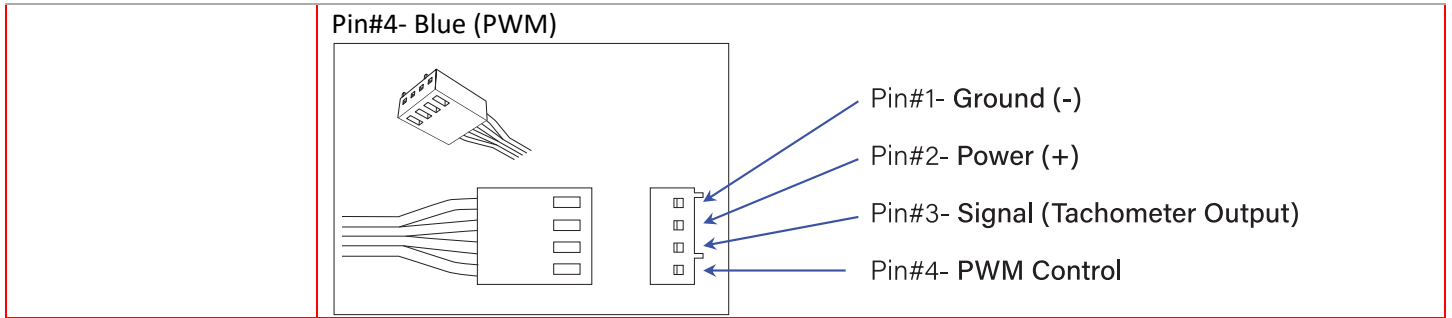

Performance Chart: Liquid Cooler L45 Thermal Resistance Thermal Resistance vs. Fan Speed (Duty Cycle and RPM)

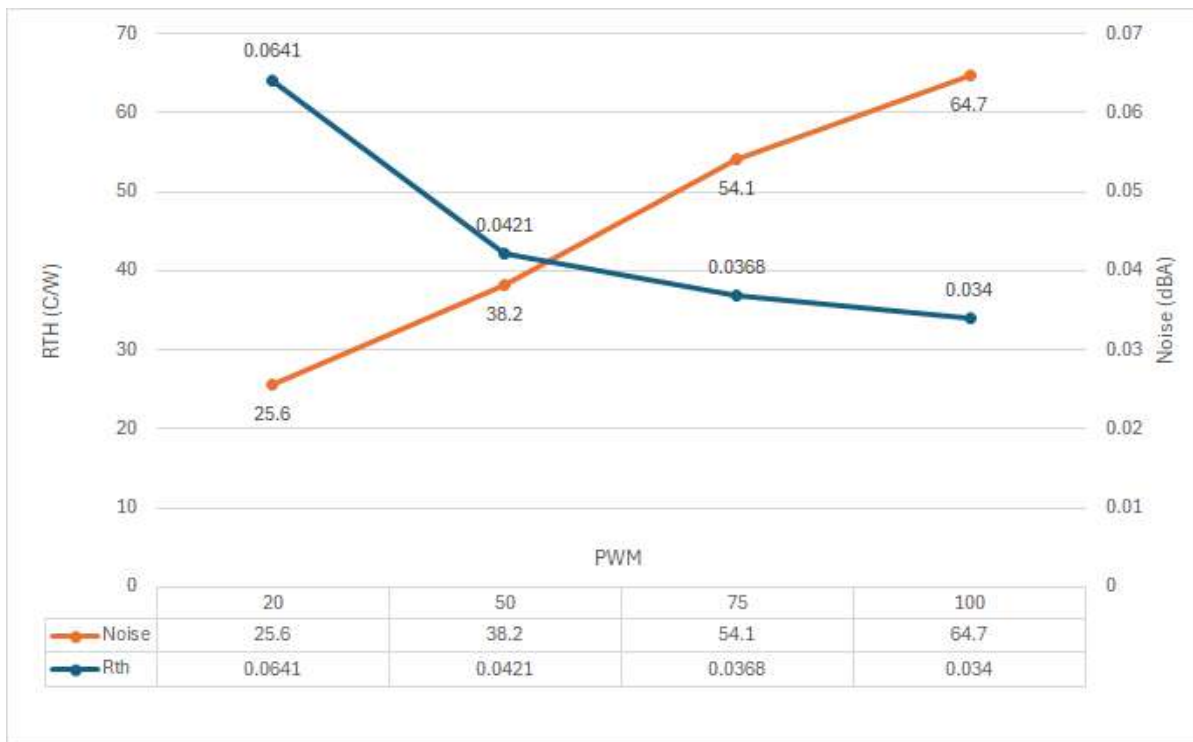

Publication History:

03/04/2024: Initial Release.

(Specifications are subject to change without notice)


4

3

2

1

REV#	DESCRIPTION	CHECKER	DATE
0.0	INITIAL RELEASE	JUN	03/01/24

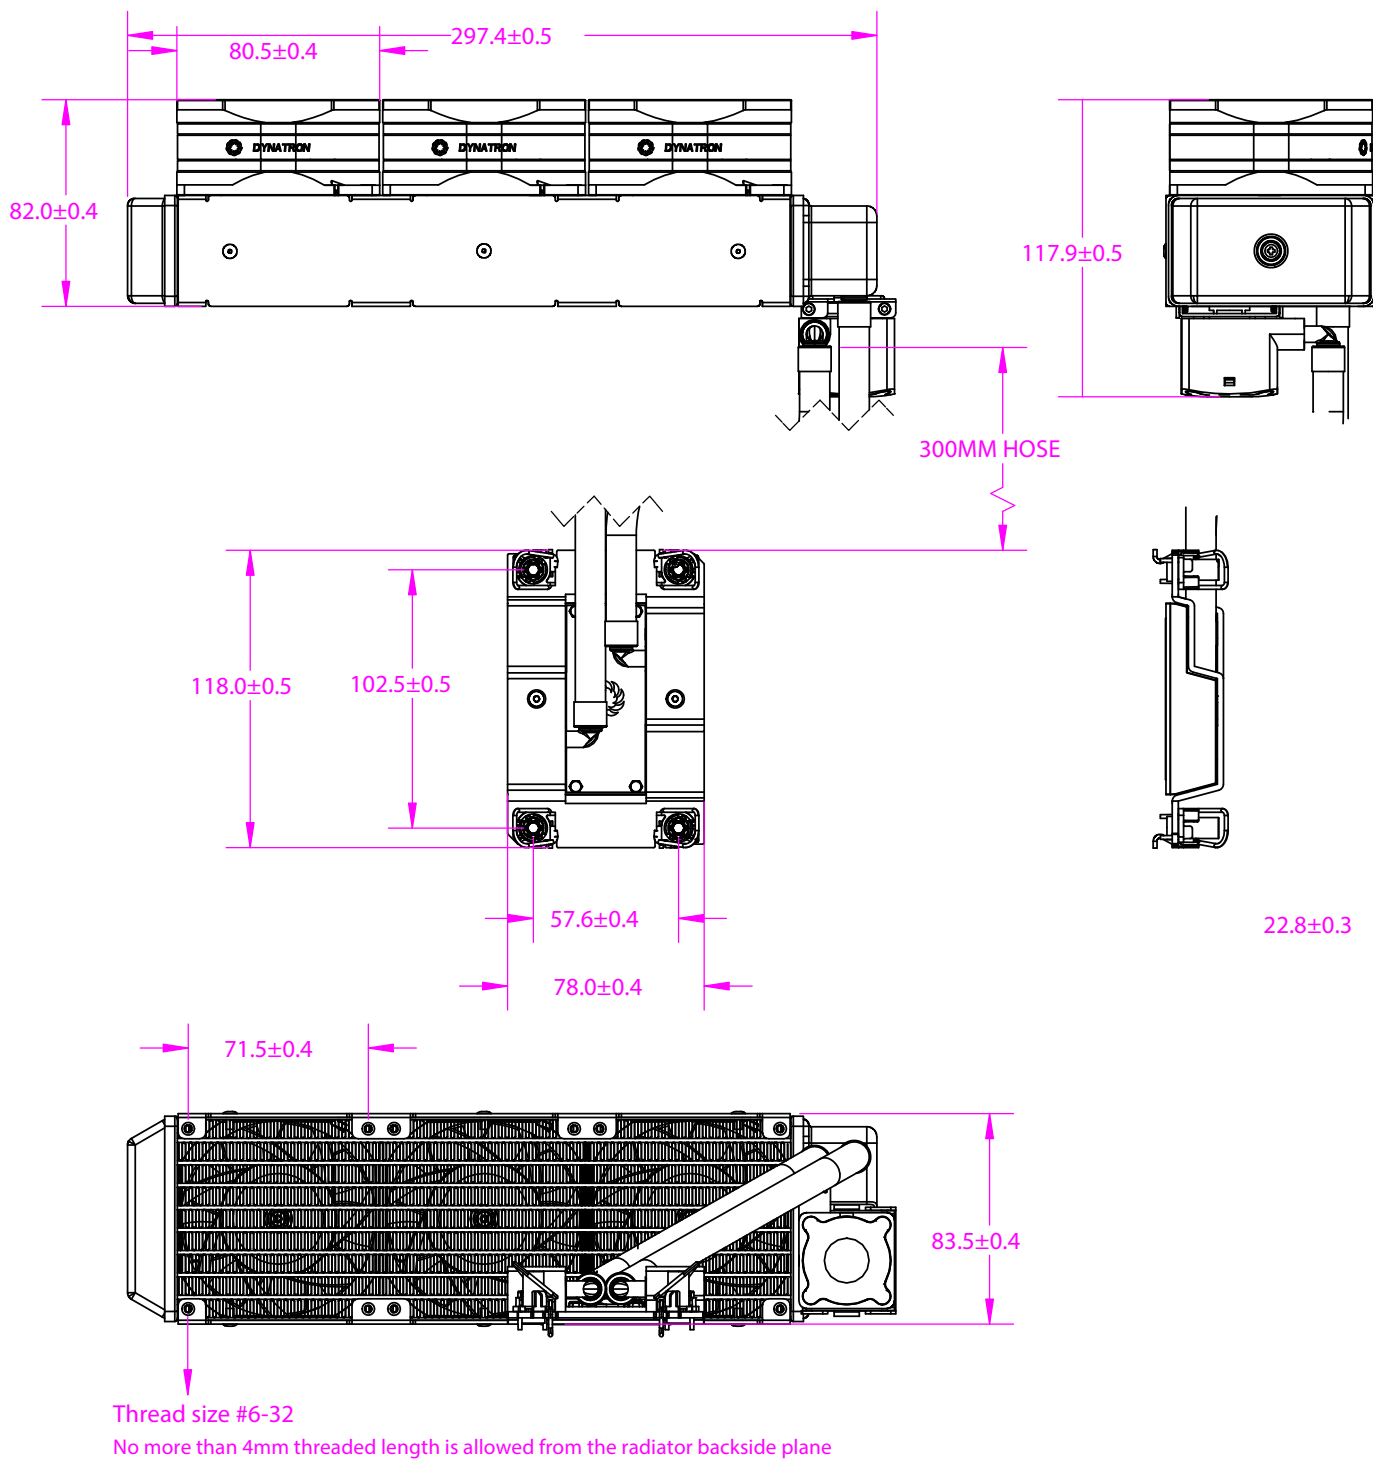

	NAME	DATE	 DYNATRON CORPORATION TOP MOTOR TITLE: 2U LIQUID COOLER L45 OVERALL DIMENSION DRAWING
DRAWN BY	JUN	3/4/2024	
CHECKED BY	JUN	3/4/2024	
ENG.APPROVED			
MFG.APPROVED			
CONFIDENTIAL DOCUMENT THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. MAY OTHERWISE AGREE TO IN WRITING.			VIEW UNITS  MM DWG. No: DYN-BD-L45 REV. 0.0

4

3

2

1

2

1



CONFIDENTIAL DOCUMENT

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. MAY OTHERWISE AGREE TO IN WRITING.

REV#	DESCRIPTION	CHECKER	DATE
0.0	INITIAL RELEASE	JUN	03/04/24

B

B

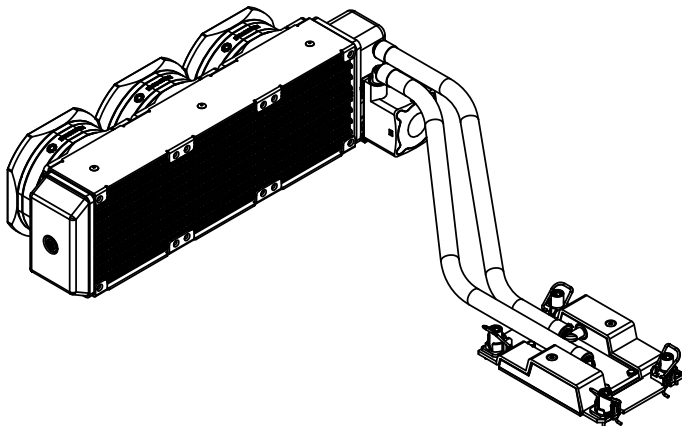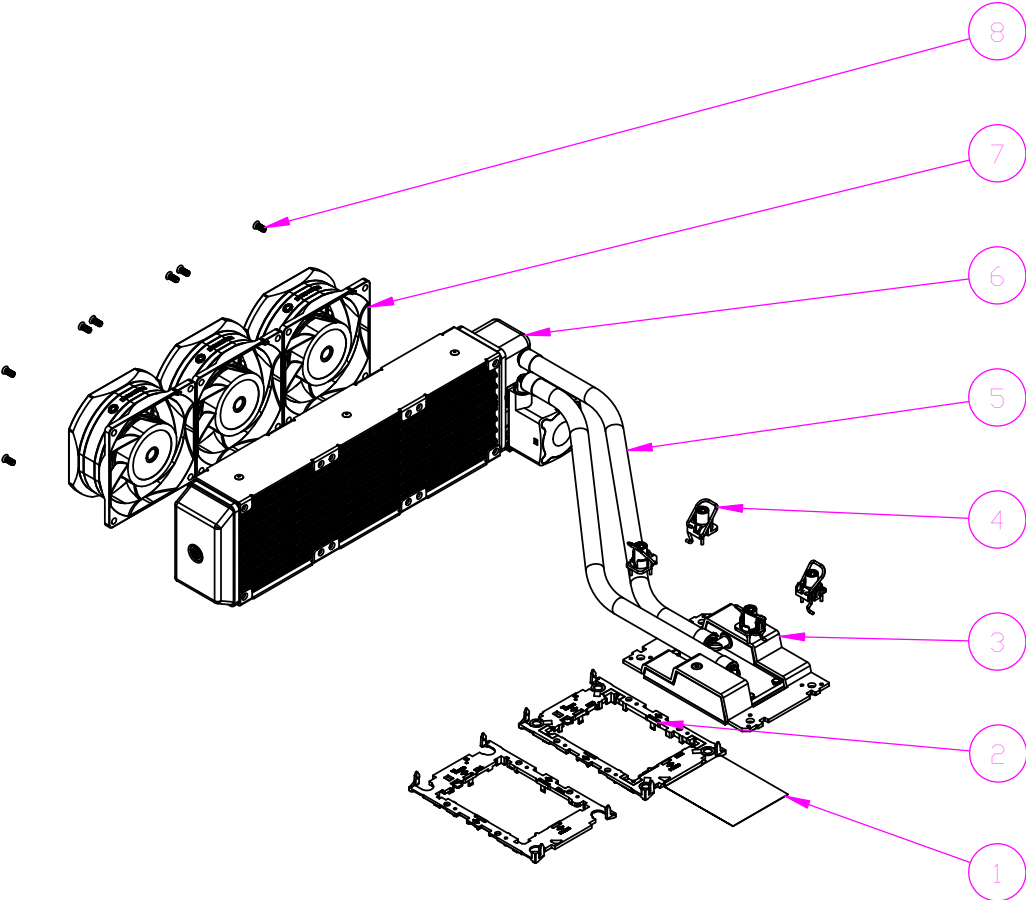

A

A

8	SCREW, FAN	STEEL	12
7	FAN, DF128038BX-PWMG	PLASTIC	3
6	RADIATOR	ALUMINUM ALLOY	1
5	HOSE, 300MM	EPDM	2
4	ANTI-TILT RETENTION KIT	PLASTIC NUT, STEEL WIRE	4
3	WATER BLOCK	CU COLDPLATE, PLASTIC LID	1
2	LGA4710 PACKAGE CARRIER (E2A + E2B)	PLASTIC	2
1	THERMAL GREASE	SHIN-ETSU X23-8079-2	N/A
ITEM #	DESCRIPTION	MATERIAL	QTY.

NOTES:
THE FIGURE IS FOR REFERENCE ONLY, AND NOT FOR SCALE

	DATE	NAME	 DYNATRON CORPORATION	
DRAWN	3/4/2024	JUN	TITLE: 2U LIQUID COOLER L45 BOM & exploded Assembly Drawing	
CHECKED	3/4/2024	JUN		
ENG.APPR.				
MFG.APPR.				
COMMENTS:			DWG. NO. DNY-EP-L45	REV 0.0

2

1